





# KICKCHARGE 88WH CAMPING LITHIUM POWER PACK

# **OWNER'S MANUAL**

**KAPHUB-80** 

# **TABLE OF CONTENTS**

WARNING AND SAFETY INFORMATION	1
PRODUCT SPECIFICATIONS	2
UNDERSTANDING YOUR POWER PACK	3
UNDERSTANDING THE LCD DISPLAY	4
RECHARGE YOUR POWER PACK	4
USING THE POWER PACK	5
WHAT'S IN THE BOX	6
CLEANING INSTRUCTIONS	6
SPECIAL ATTENTION	6

#### WARNING AND SAFETY INFORMATION

- · Read the user manual carefully before using the product.
- DO NOT use the product near a heat source, such as a fire source or a heating furnace.
- Avoid contact with liquids of any kind. DO NOT use the product in the rain or in high humidity.
- DO NOT operate the product with a damaged cord or plug, or a damaged output cable.
- DO NOT use the product around strong static electricity or magnetic fields.
- DO NOT disassemble in any way or puncture the product with sharp objects.
- · Avoid using wires or metal objects that may result in a short circuit.
- This product must not be used by people (including children) with reduced
  physical or mental capabilities. Also, this product is not to be used by a
  person who has a lack of knowledge or experience with this type of product,
  unless they are supervised by a person who is competent in the safe use of
  this type of product.
- DO NOT expose the power pack to rain, water, snow or excessive moisture.
- Store the product in a dry and ventilated place.
- Fully charge the power pack before first use or if the power pack has not been used for a long period of time.
- To maximize the battery life, it is highly recommended to fully charge the battery every 3 months.
- Avoid charging the battery in the direct sunlight or a hot environment.
- As soon as a battery is fully charged, disconnect the battery from the charger and disconnect the charger from the power source.
- Avoid leaving the power pack unattended while charging overnight.


## **PRODUCT SPECIFICATIONS**

Battery Capacity	88.8Wh /3.7V 24000mAh
Cell Type	Li PO
USB C PD Output x 1	60W Max
USB A Output x 1	QC 3.0 18W Max x 1
Wireless Charging Output	10W Max
LED Light Output	5W x 1
USB C PD Input x 1	60W Max
Working Temperature	-15~45°C
Weight (net weight)	1kg
Product Dimensions	170 x 83 x 32 mm
Product Certifications	IEC 62133

## **UNDERSTANDING YOUR POWER PACK**



## **UNDERSTANDING THE LCD DISPLAY**

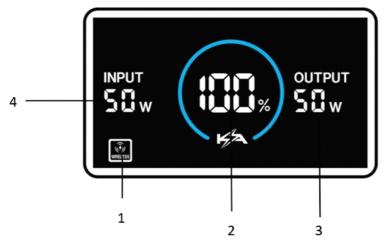

- 1. Wireless output Indicator
- 2. Battery Level
- 3. Output Power Status
- 4. Input Power status

## **RECHARGE YOUR POWER PACK**

The Kick Charge 88 Power Pack contains an 88.8Wh Li PO battery pack.

• Charging through the 60W PD Cable (INCLUDED): about 3 hours.

#### **USING THE POWER PACK**

The power pack consists of multiple outputs that can be used at the same time.

#### **USB Output**

- 1 x USB C PD 60W Max
- 1 x USB A QC 3.0 18W Max
- · Both USB ports can work simultaneously at the rated capacity.

#### **Wireless Output**

- To active wireless charging, short press button 1.
- The wireless output indicator on the LCD display will appear to indicate that the wireless charging function is active.
- For efficient charging, place your device vertically and straight to ensure stability and optimal power flow.
- To turn off wireless charging, simply remove your charging device and wireless output indicator will be off in 3 minutes

#### **LED Light Operation**

- Amber LED Light: Press and hold button 1 for 3 seconds to turn ON and OFF
- White LED Light: Short press button 1 twice to turn ON and OFF.
- SOS Light: Short press button 1 four times to turn ON; Press and hold button 1 for 3 seconds to turn OFF.

#### WHAT'S IN THE BOX



#### **CLEANING INSTRUCTIONS**

- Ensure the power pack is disconnected from the mains before performing any cleaning activities.
- DO NOT use sharp or hard objects to clean up as they damage the surface of the product.
- $\,$  DO NOT use alcohol-based cleaning materials to clean the power station.
- Occasionally clean the power pack with a damp cloth.

### **SPECIAL ATTENTION**

• When discharging from the PD 60W, the battery pack can be discharged to 1%.



KickAss is a registered trademark of KickAss Products Pty Ltd.

Designed & imported by KickAss Products Pty Ltd 39 Iris Place, Acacia Ridge, QLD 4110 Australia

Made in China

